
NO SLINGER

Accessory Unboxing and Assembly Guide

For the SJS Straw Filler

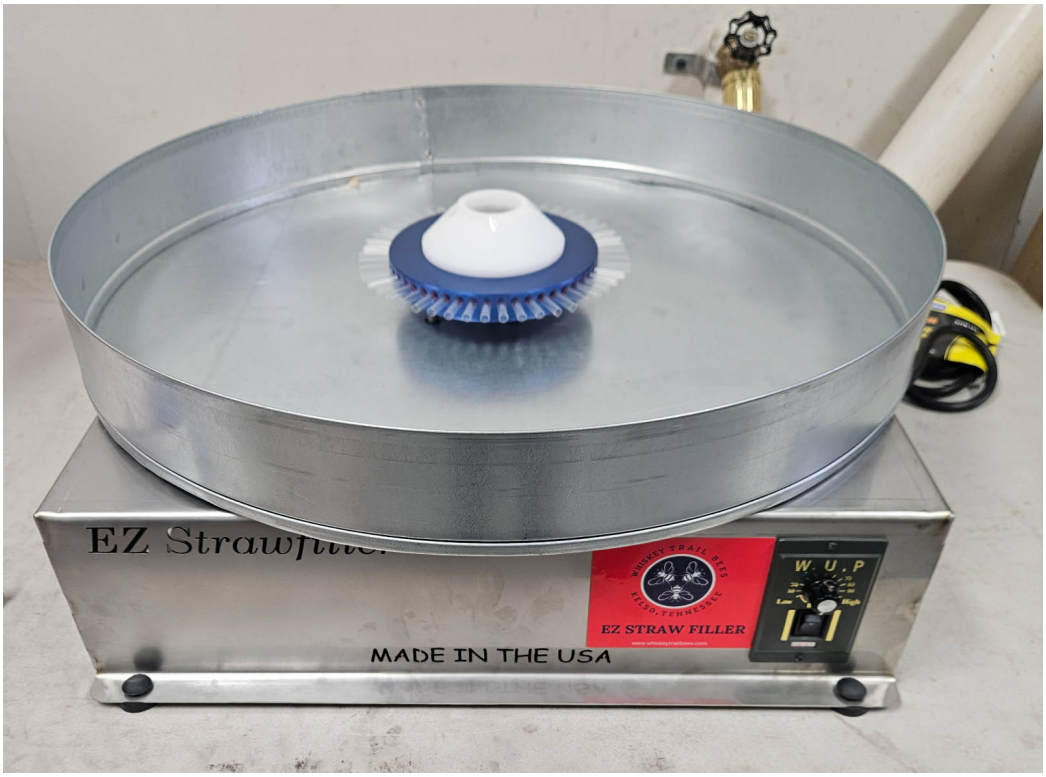

Completed No Slinger accessory installation shown on the SJS Straw Filler.

Before You Begin

Disconnect the Straw Filler from electrical power before removing the cap, loosening the center fastener, or lifting the blue filling head. Work on a clean, stable surface and keep all food-contact components clean.

Important: No torque value is specified in this photo guide. Tighten retained hardware only until secure; do not force or over-tighten. Do not operate the Straw Filler until the head, cap, and No Slinger are fully seated and stable.

Installation Sequence

1. Unbox and Inspect the No Slinger
2. Prepare the Straw Filler
3. Remove the White Cap
4. Loosen the Center Fastener
5. Remove and Retain the Center Hardware
6. Remove the Blue Straw Filler Head
7. Drop the No Slinger Into Place
8. Reinstall the Blue Head
9. Secure the Head and Reinstall the Cap

STEP 1 OF 9


Unbox and Inspect the No Slinger



Open the accessory carton and remove the circular No Slinger assembly. Inspect the rim, center opening, and surrounding surfaces for shipping damage before installation.

STEP 2 OF 9


Prepare the Straw Filler

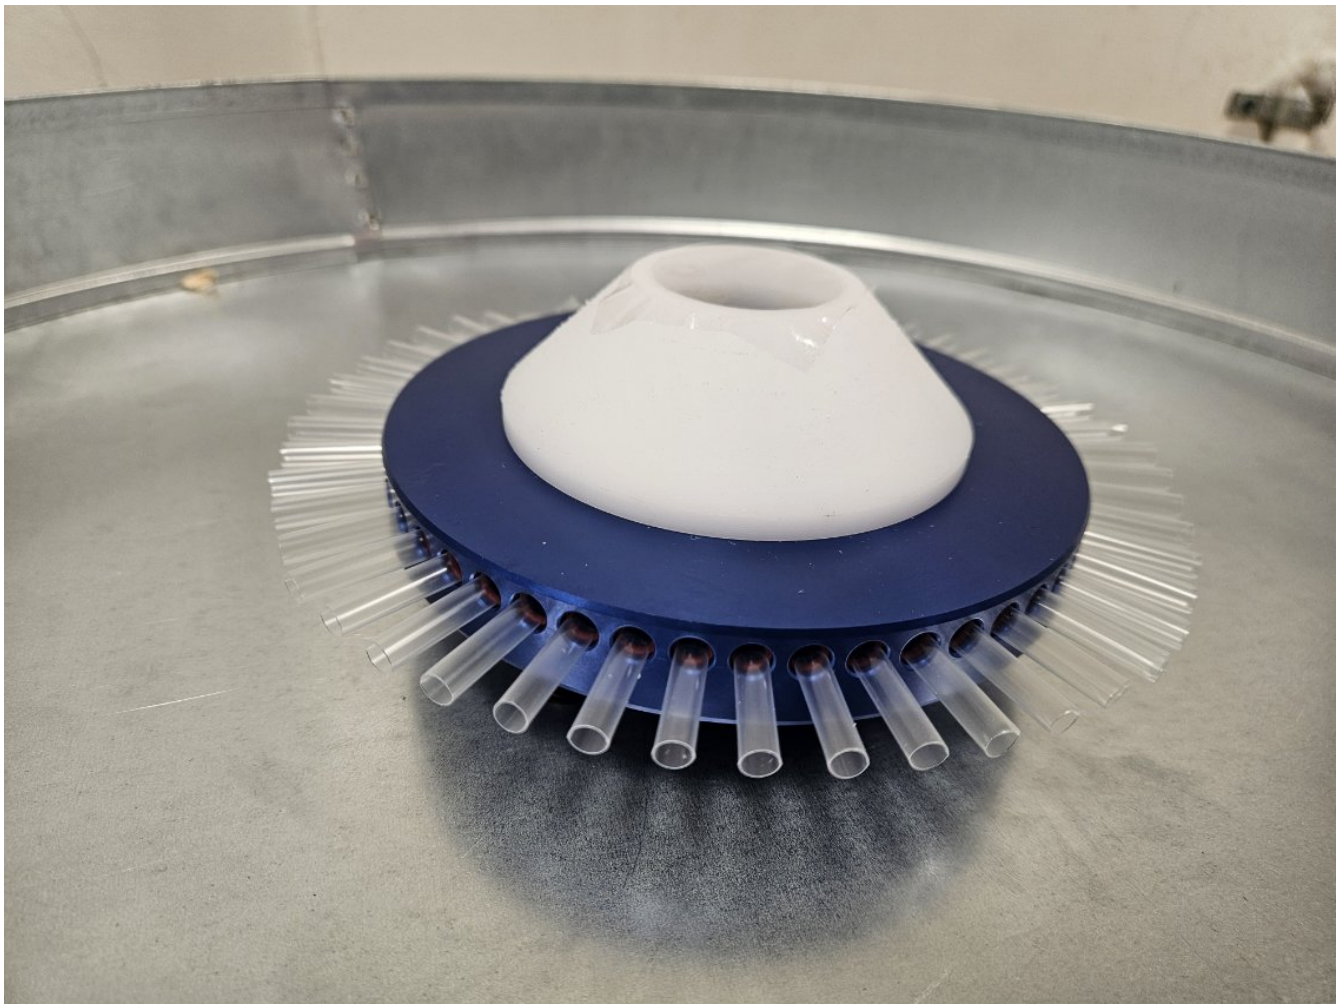

Disconnect electrical power and place the Straw Filler on a clean, stable surface. Note the original position of the white cap, blue filling head, straws, and center hardware before disassembly.

STEP 3 OF 9


Remove the White Cap

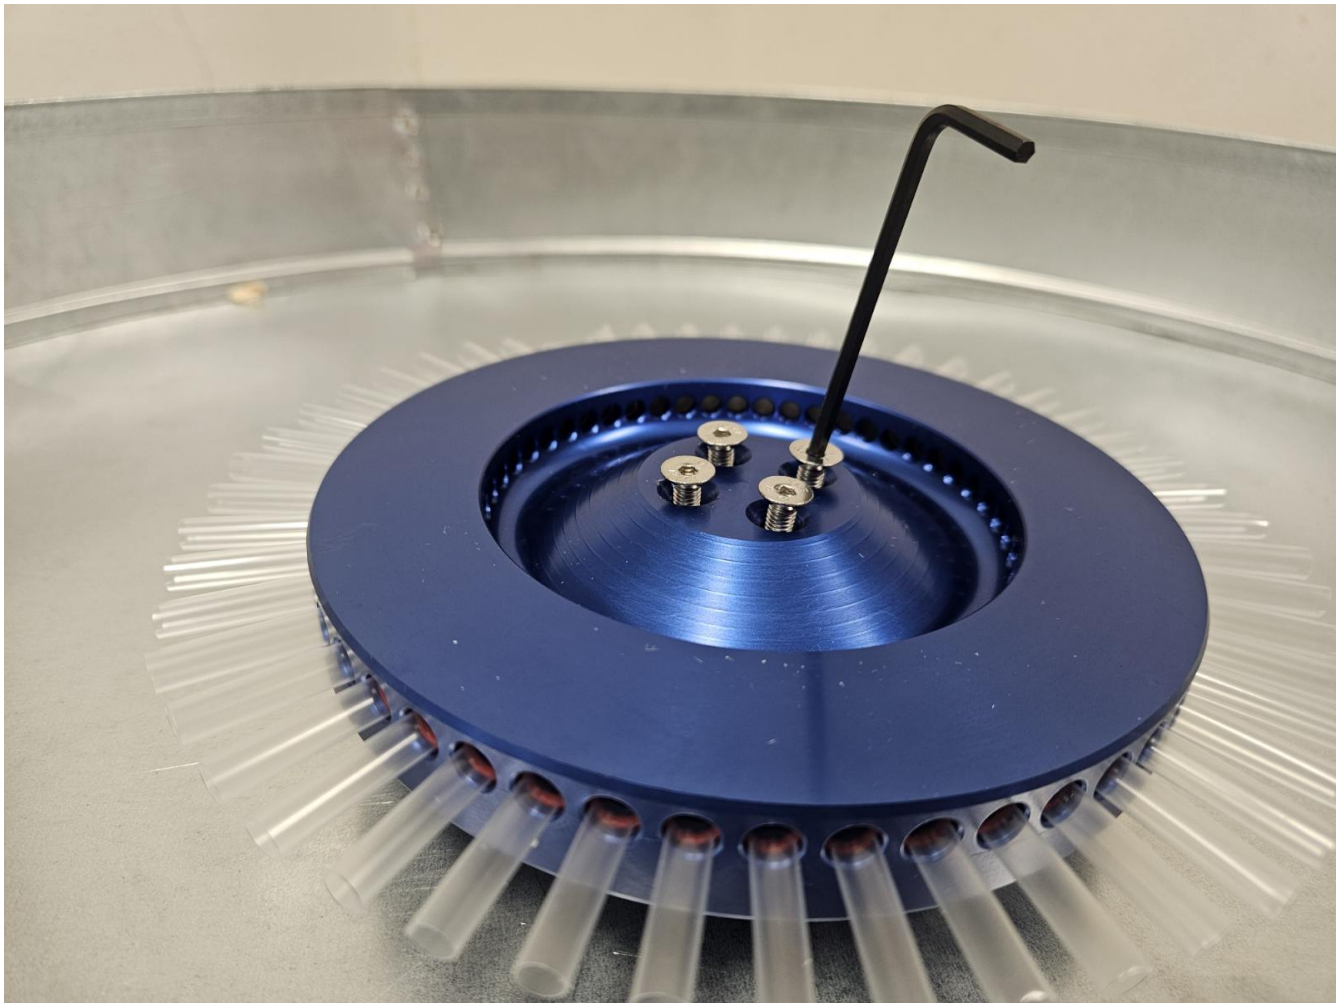

Lift off the white cap to expose the blue filling head and center fastener. Keep the cap clean and set it aside where it cannot be damaged.

STEP 4 OF 9


Loosen the Center Fastener

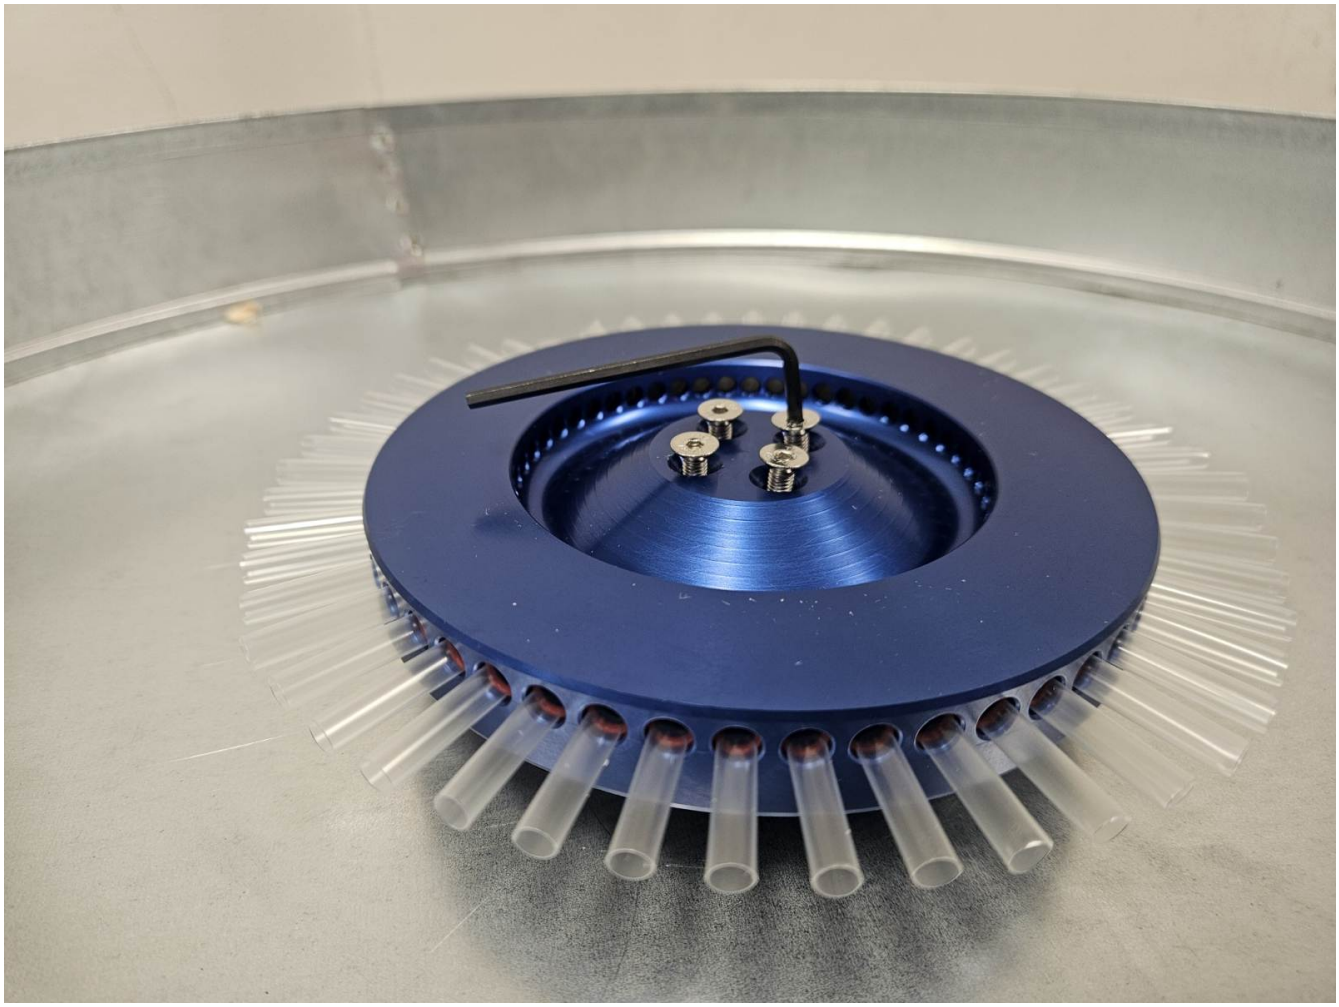

Use the supplied hex key to loosen the center fastener. Support the blue head while loosening so it remains level and does not shift unexpectedly.

STEP 5 OF 9

Remove and Retain the Center Hardware

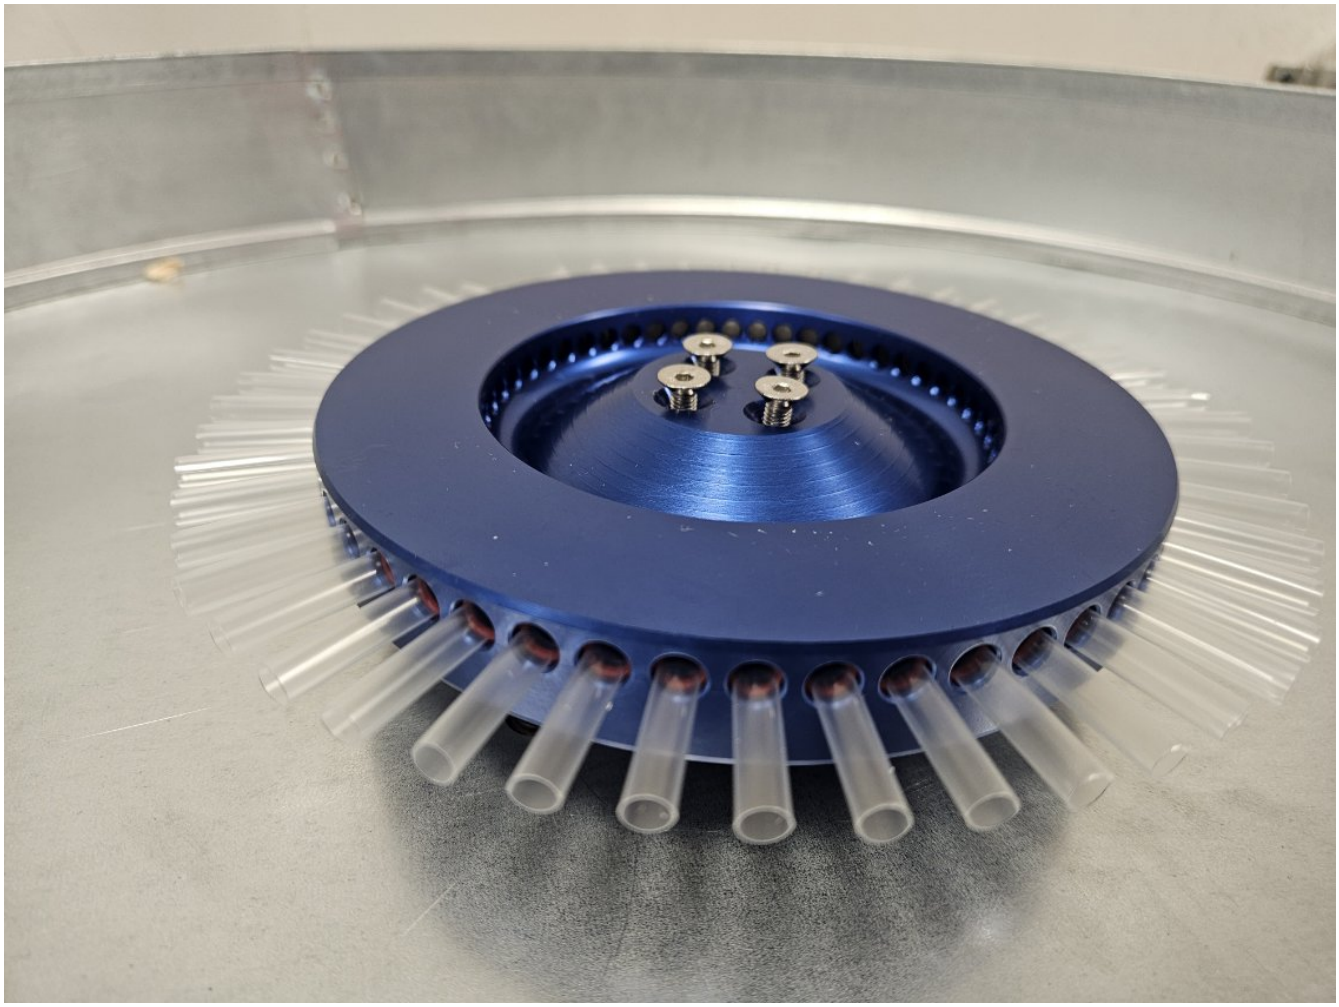

Remove the loosened hardware and keep all pieces together for reassembly. Do not allow small parts to fall into the machine or work area.

STEP 6 OF 9

Remove the Blue Straw Filler Head



Lift the blue Straw Filler head straight up and clear of the center drive. Place it on a clean surface without bending or disturbing the installed straws.

STEP 7 OF 9


Drop the No Slinger Into Place



Lower the No Slinger assembly into position over the top of the machine. Center its opening around the exposed drive and confirm that the accessory sits flat and stable.

STEP 8 OF 9


Reinstall the Blue Head

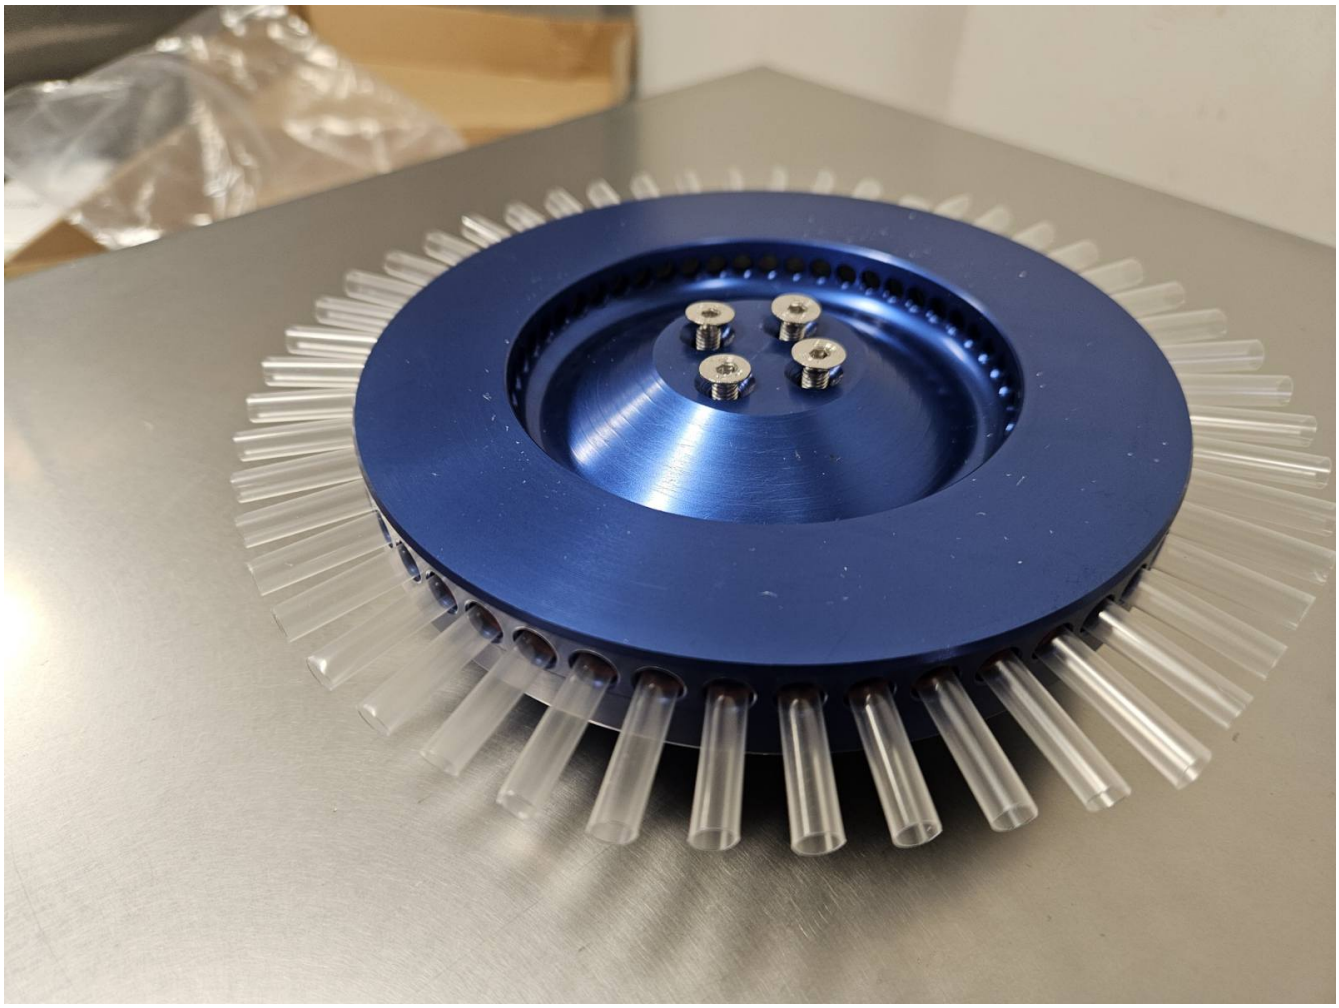

Lower the blue Straw Filler head back onto the center drive. Align the head and center hardware locations before installing the retained fasteners.

STEP 9 OF 9

Secure the Head and Reinstall the Cap

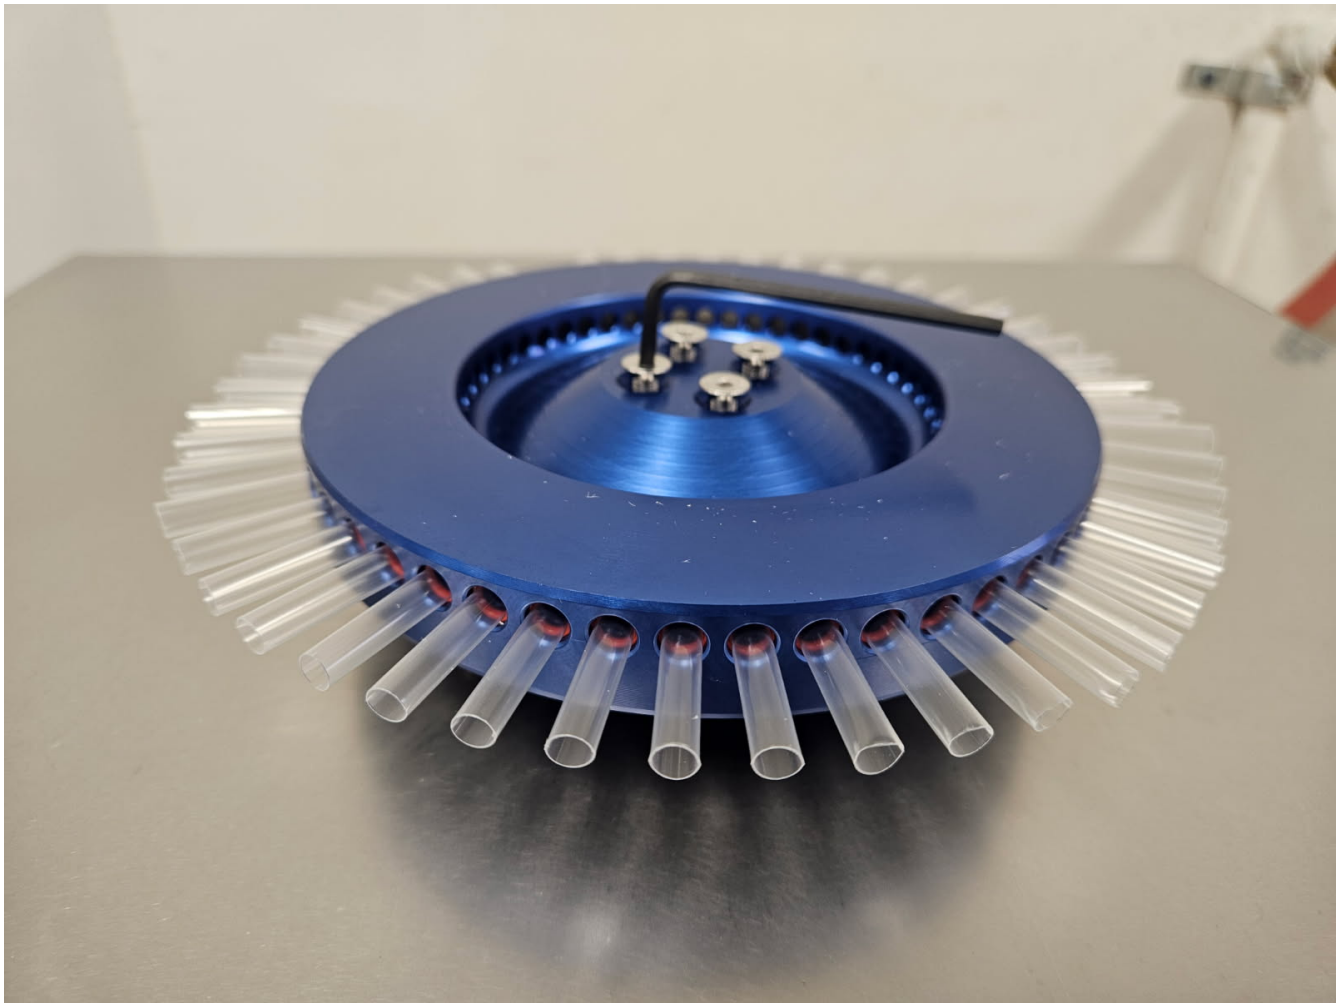

Reinstall the center hardware and tighten with the supplied hex key only until secure. Do not force or over-tighten. Replace the white cap and confirm that the head turns and sits evenly.

Installation complete: Reconnect power only after the full assembly has been inspected and the normal Straw Filler operating instructions have been reviewed.